

YAGI Antenna - UHF

YAGI antena - UHF

DTX-48F

✓ **The antenna is especially designed for the digital terrestrial signal's (DVB-T) reception**
Antena je pripravljena za sprejem digitalnih zemeljskih signalov (DVB-T)


✓ **Covers frequency range 470 - 862 MHz (Ch. 21-69).**
Pokriva frekvenčni pas 470 - 862 MHz (kanal 21-69).

✓ **Impedance 75 Ohm.**
Impedanca 75 Ohm.

✓ **Antenna carrier 18x18 mm.**
Nosilec antene 18x18 mm.

✓ **Can be used for both horizontal or vertical polarization.**
Primerna za horizontalno ali vertikalno polarizacijo.

✓ **Reliable and robust design for optimum performance and long life time.**
Zanesljiv in robusten dizajn za optimalno delovanje in dolgo življenjsko dobo.

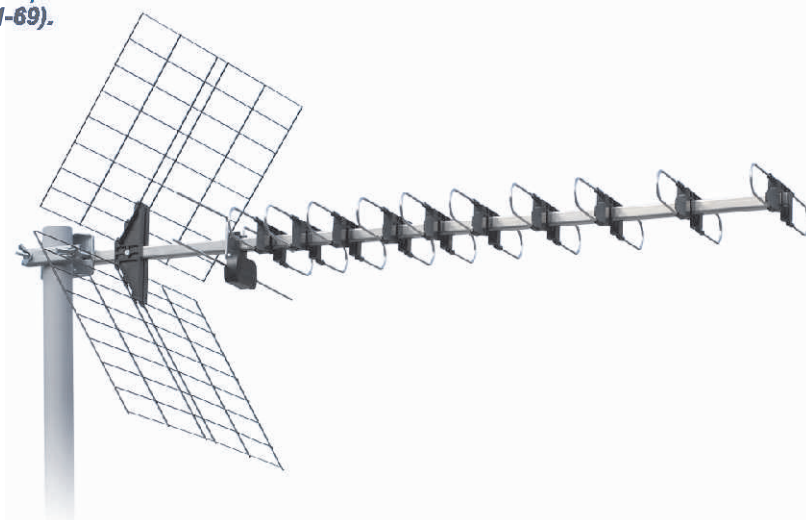

Type Tip	No. of elements Število elementov	Gain Dobitek	F/B ratio Razmerje napr.-naz.	Beam width Širina glav. lista	Antenna length Dolžina antene	Connection Priključek	Packing Pakiranje	
							pcs. kos	cm / m3 cm / m3
DTX-48 F	48	11 - 16 dB(i)	> 29 dB	H 54-26°	111cm	"F"	10	117x37x29 / 0,126

